



品質 **G** 未乾燥材 **AD** 天然乾燥材 **KD** 人工乾燥材 **KDM** 人工乾燥材モルダー仕上げ

用途	樹種	品質	等級	厚み (mm)	幅 (mm)	長さ (m)					適用
						2	3	4	5	6	
そり隅木	ヒノキ	G	上小 ～ 無節	105	タイコ	●	●	●			芯持ち タイコ
				120	タイコ						
棒隅木	ヒノキ	G	特等 ～ 端無節	105	105	●	●	●			見え隠れ材 ～ 見え掛かり材
				120	120						
貫板	スギ	G	特等	15	105			●			
屋根野地 ・ ラス下地	スギ ・ ヒノキ	G	特等	12	75		●	●			
					90						
					105						
化粧野地板	スギ	KD	一等 上小 無節	12	150 180	●				相決加工	
畳下地	スギ	KD	特等	15	180	●					
					210	●					

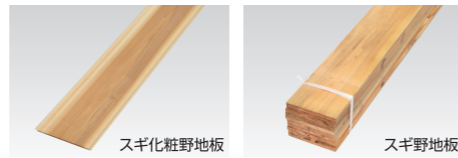

和室周り造作材

用途	樹種	品質	等級	厚み (mm)	幅 (mm)	長さ (m)					適用
						2	3	4	5	6	
鴨居	スギ 源平	KD	無節	45	105						コバ柱目
				45	120						
				60	105	●	●	●	●		
				60	120						
	スギ赤	無節	45	105							
			45	120							
竿縁 回り縁 付鴨居	スギ 源平	KD	無節	30	30	●	●	●		平柱材	
				30	45						
				45	45	●	●	●	●		
				45	60						
	スギ赤	無節	30	30	●	●	●				
			30	45							
45	45	●	●	●	●						
45	60										
長押	スギ 源平	KD	無節	斜面	105 120		●	●	●	平柱材	
	スギ赤	無節	斜面	105 120							
敷居	ヒノキ	KD	無節	45	105	●	●	●	●	コバ柱材	
				45	120						
				55	105						
				55	120						
				60	105						
				60	120						

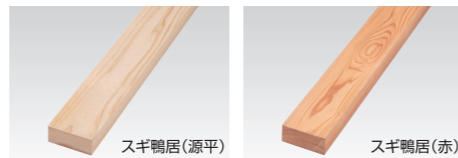

品質 **G** 未乾燥材 **AD** 天然乾燥材 **KD** 人工乾燥材 **KDM** 人工乾燥材モルダー仕上げ

造作材

用途	樹種	品質	等級	厚み (mm)	幅 (mm)	長さ (m)					適用
						2	3	4	5	6	
鴨居 ・ 敷居	ヒノキ	KD	無節	45	105						芯去り材
				45	120	●	●	●	●		
				60	105						
				60	120						
框 縁框	ヒノキ	AD	上小 無節	105	150					芯持ち 又は 芯去り材	
				120	180	●	●	●	●		
	120			210							
	地マツ			上小 無節	105	150					
120	210										
中鴨居 楯(まぐさ)	ヒノキ	KD	3方無節	90	105					芯持ち 又は 芯去り材	
				105	120	●	●	●	●		
	120			150							
	スギ			90	105						
スギ赤	105	120									
額縁 幅木他	ヒノキ	KD	上小 ～ 無節	30	60					芯去り材	
					90						
					105						
					120						
					150						
					180						
	210			●	●	●					
	スギ			上小 ～ 無節	60						
					90						
					105						
					120						
					150						
180											
210											



内装材・外装材

用途	樹種	品質	等級	厚み (mm)	幅 (mm)	長さ (m)					適用
						2	3	4	5	6	
床板 フローリング	ヒノキ	KD	節有	15	92	●	●				
				上小～ 無地	14.5	92	●	●	●		
					14.5	108					
	スギ		節有	25	92	●	●				
				上小～ 無地	15	105	●	●			
					15	120					
無地	15	150	●	●	●						
	15	120									

